

1/8

Fig. 1

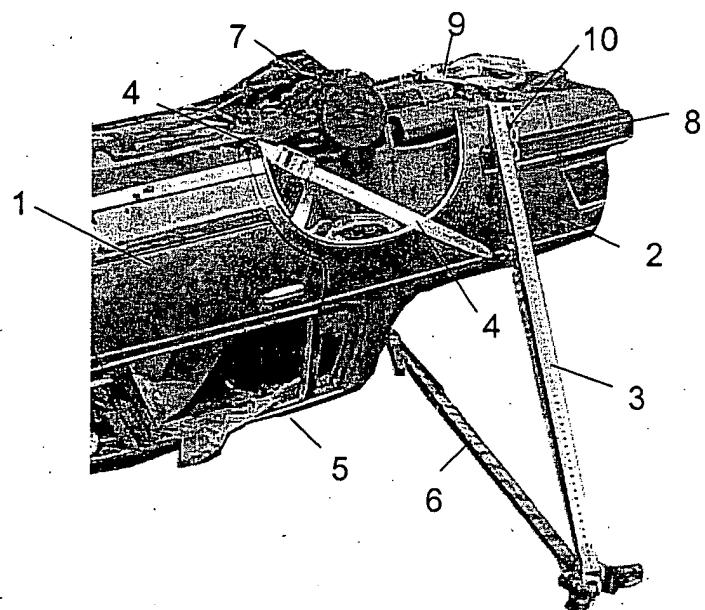


Fig. 2


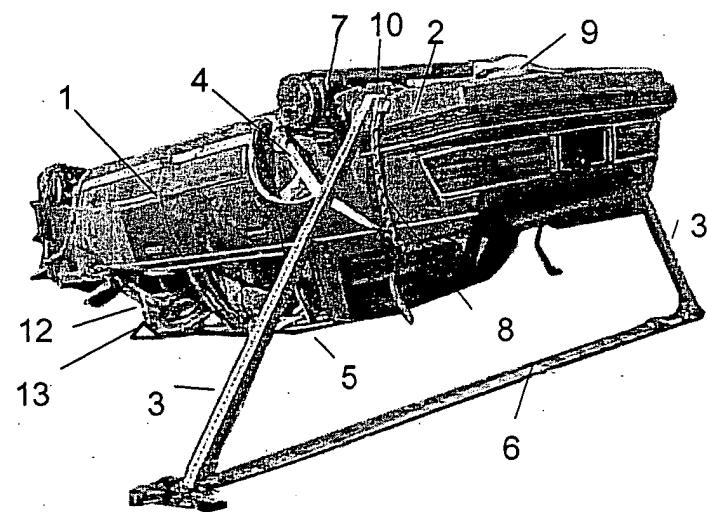


Fig. 3

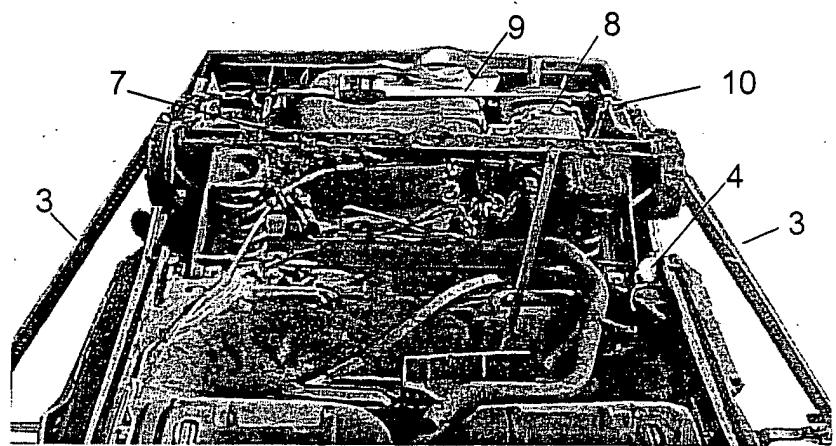

BEST AVAILABLE COPY

Fig. 4


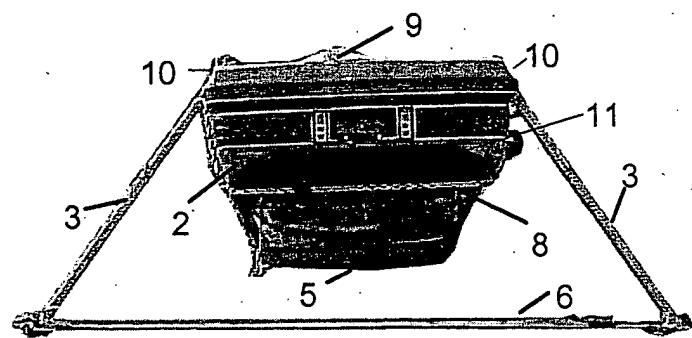


Fig. 5

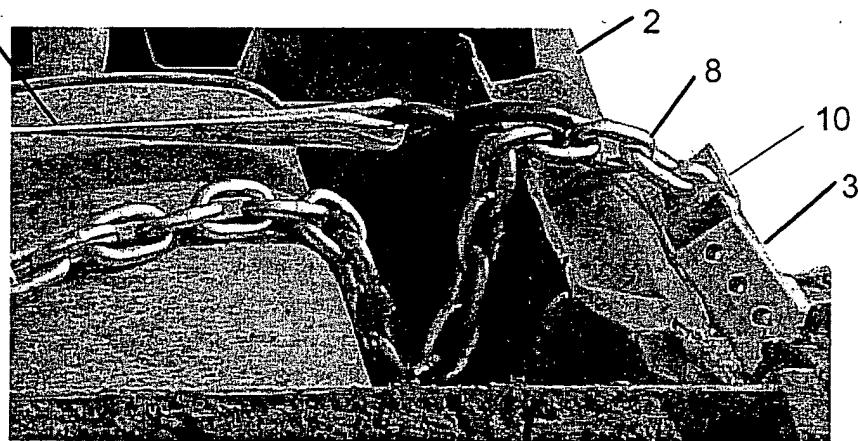

BEST AVAILABLE COPY

Fig. 6

61 Lean buttress stands against each fender

62 Run chain under end of vehicle and engage with grab-type fitting

63 Tighten slack and pull end fittings together toward fenders

64 Restrain chain with ratchet strap

65 Attach ratchet strap to bases of buttress stands and tighten

66 Place wedges at opposite end of vehicle.

Fig. 7

71 Place jack stand with chain grab fitting at clear fender side

72 Attach chain to undercarriage and run to clear fender

73 Engage chain with jack stand chain grab

74 Run chain across trunk lid and turn back toward rear bumper to engage second stand with chain grab leaning in direction of vehicle against the bumper

75 Tie back chain at trunk lid to rear roof post on obstructed side

76 Place wedge between fender and obstruction and adjust jack to tighten vehicle

Fig. 8a

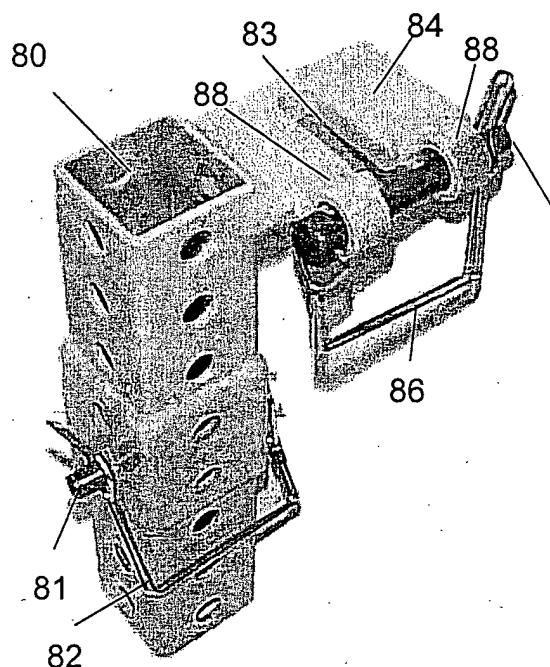


Fig. 8b

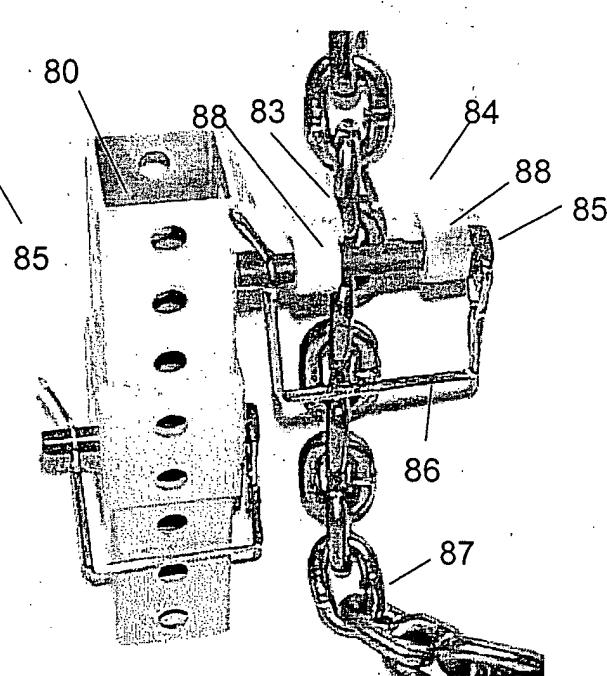


Fig. 8c

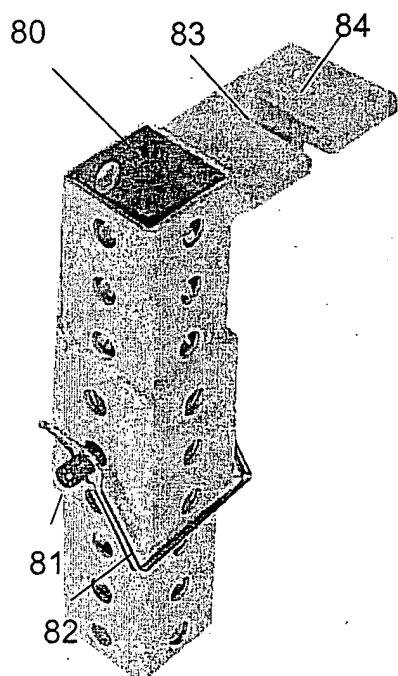


Fig. 9

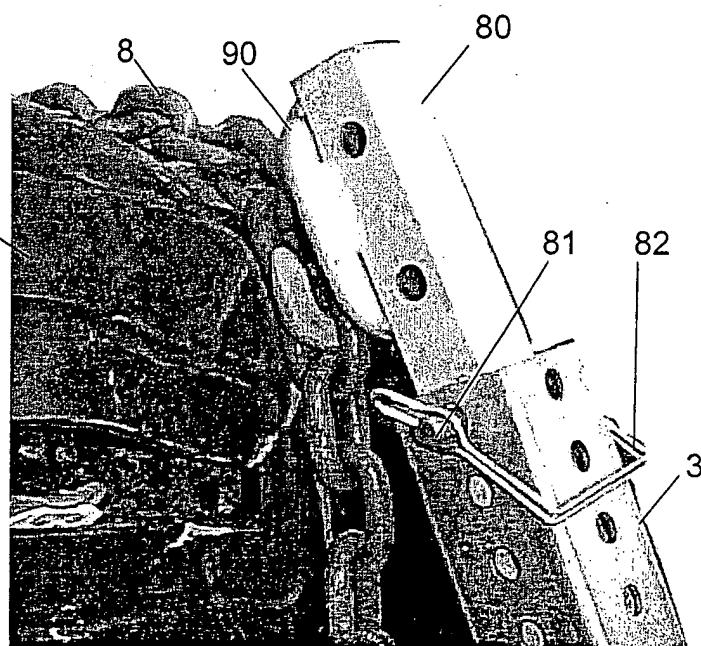


Fig. 10


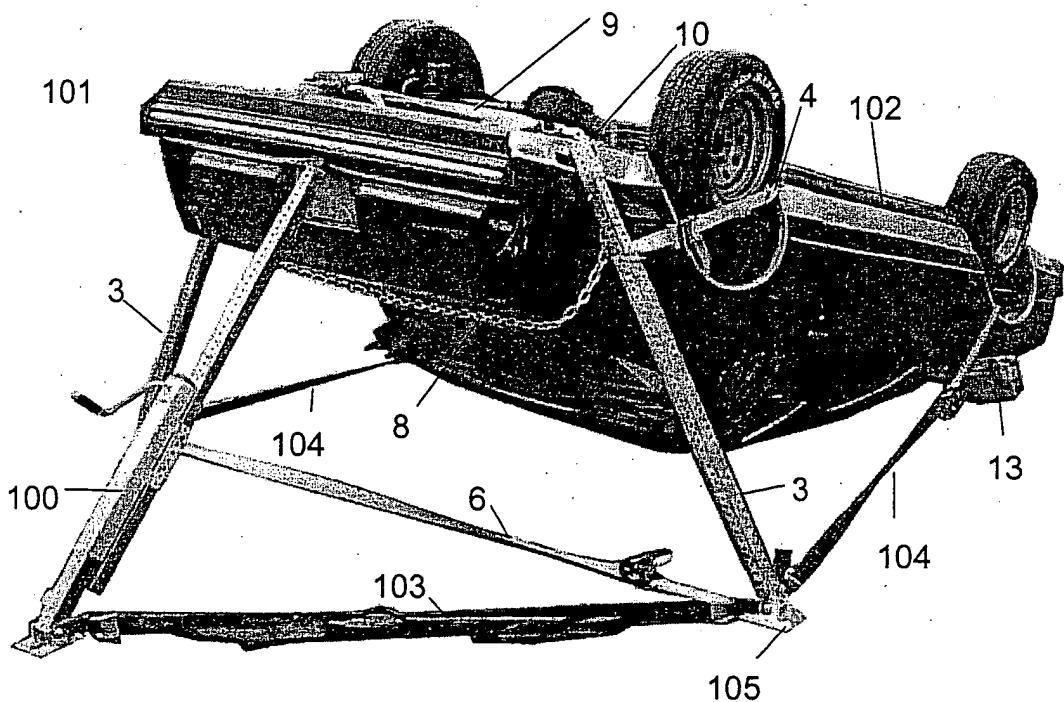


Fig. 11

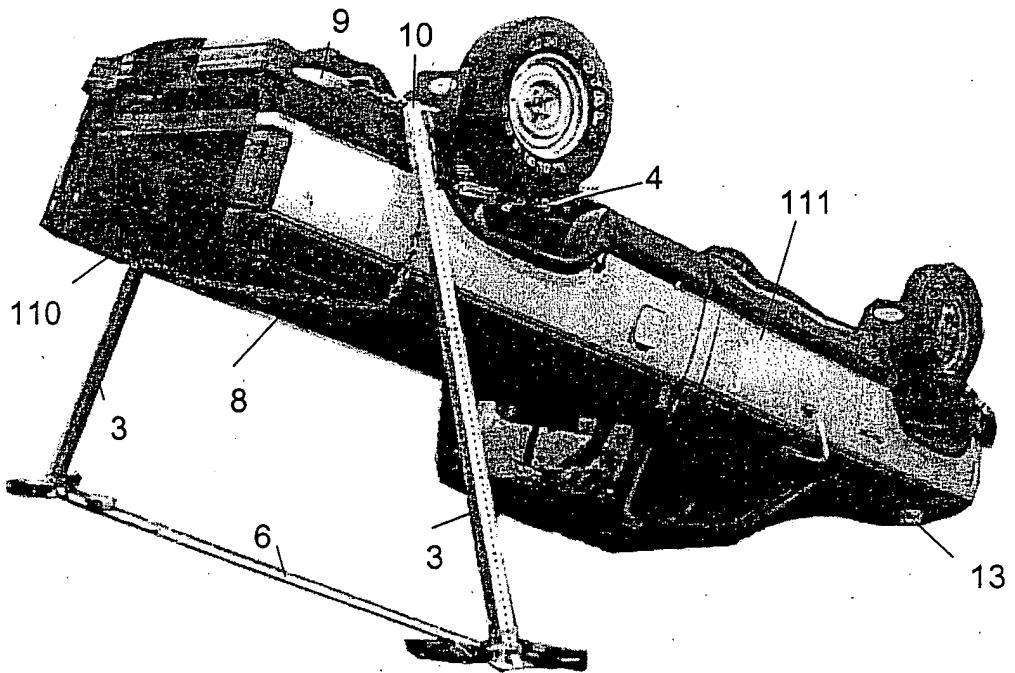

BEST AVAILABLE COPY

Fig. 12


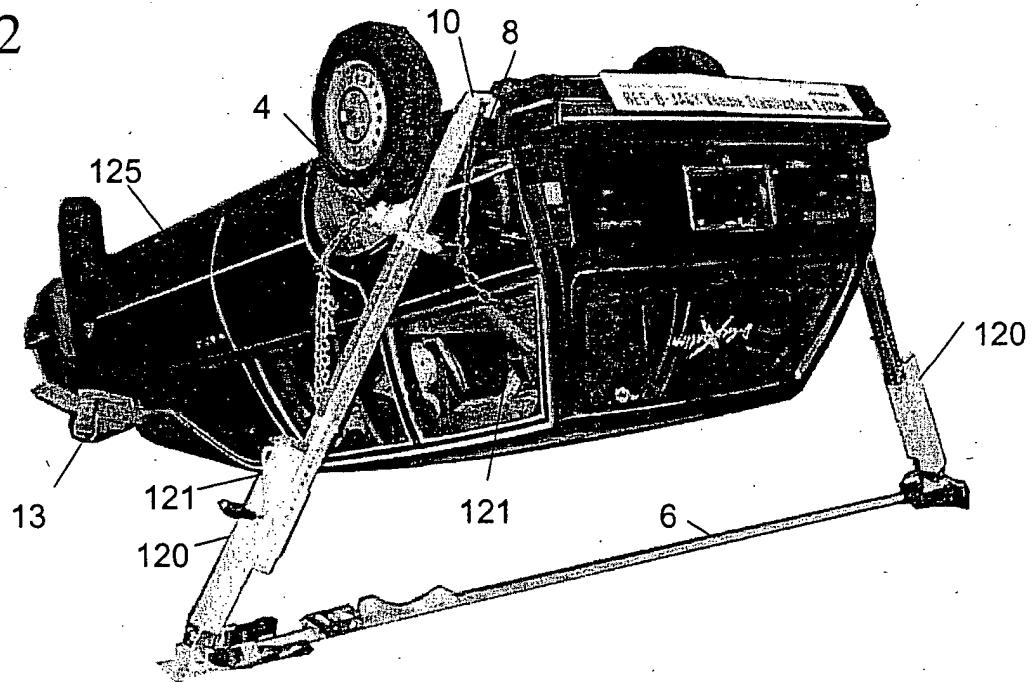


Fig. 13

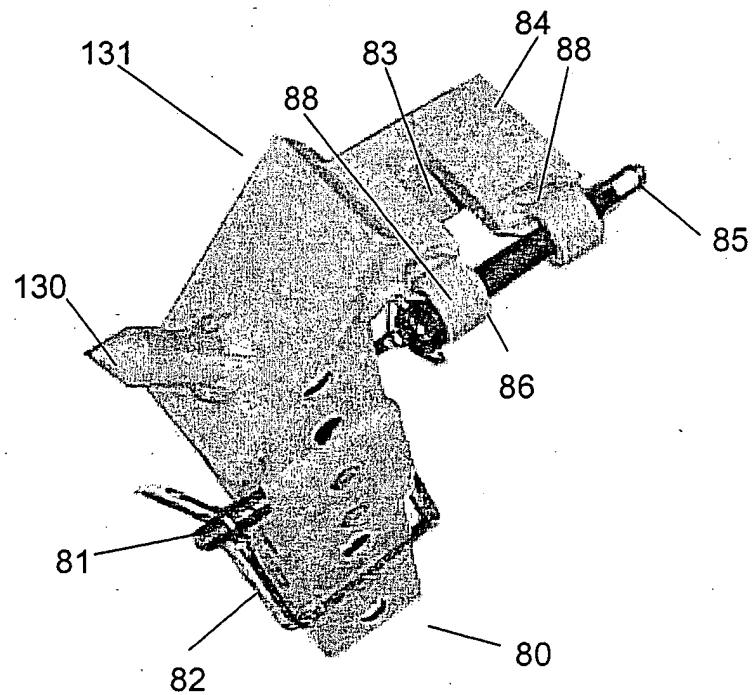

BEST AVAILABLE COPY

7/8

Fig. 14



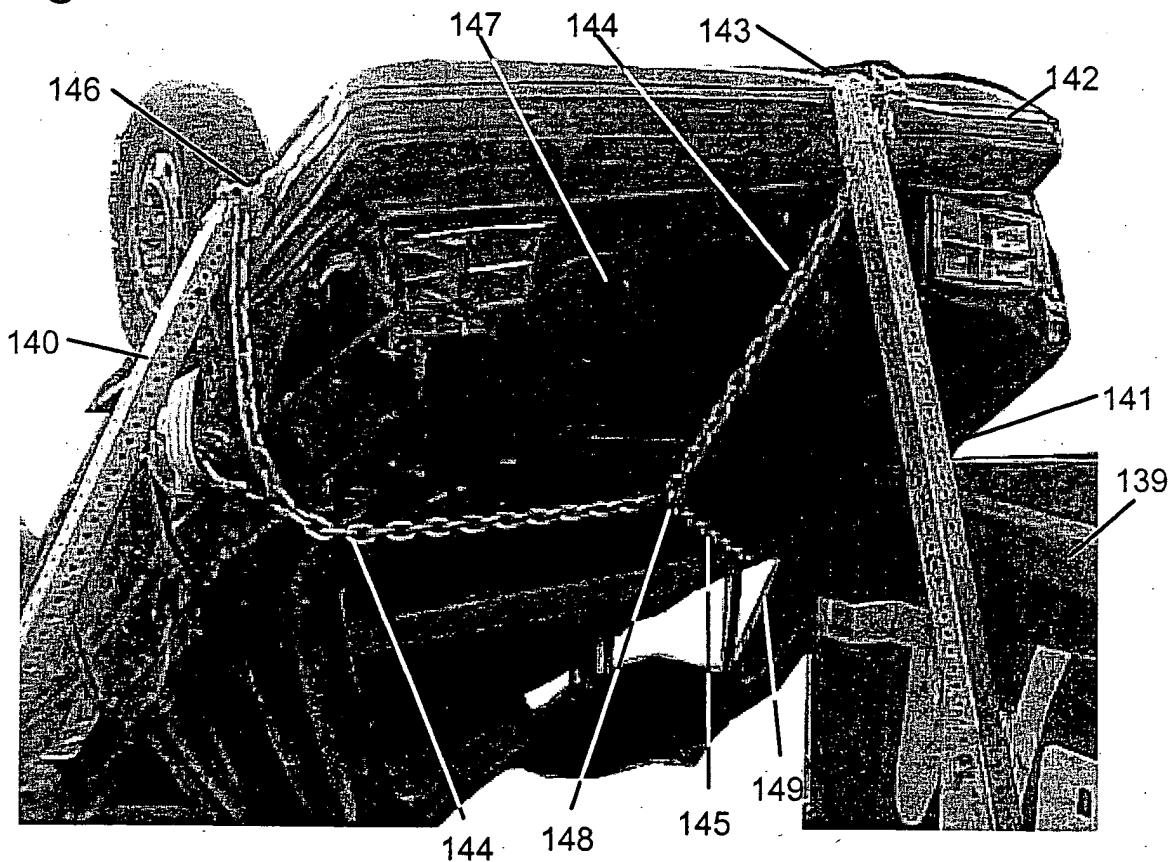


Fig. 15

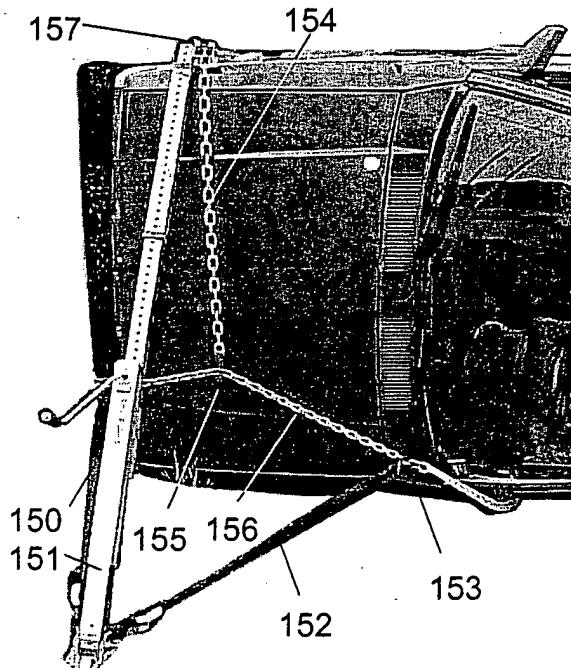


BEST AVAILABLE COPY

Fig. 16

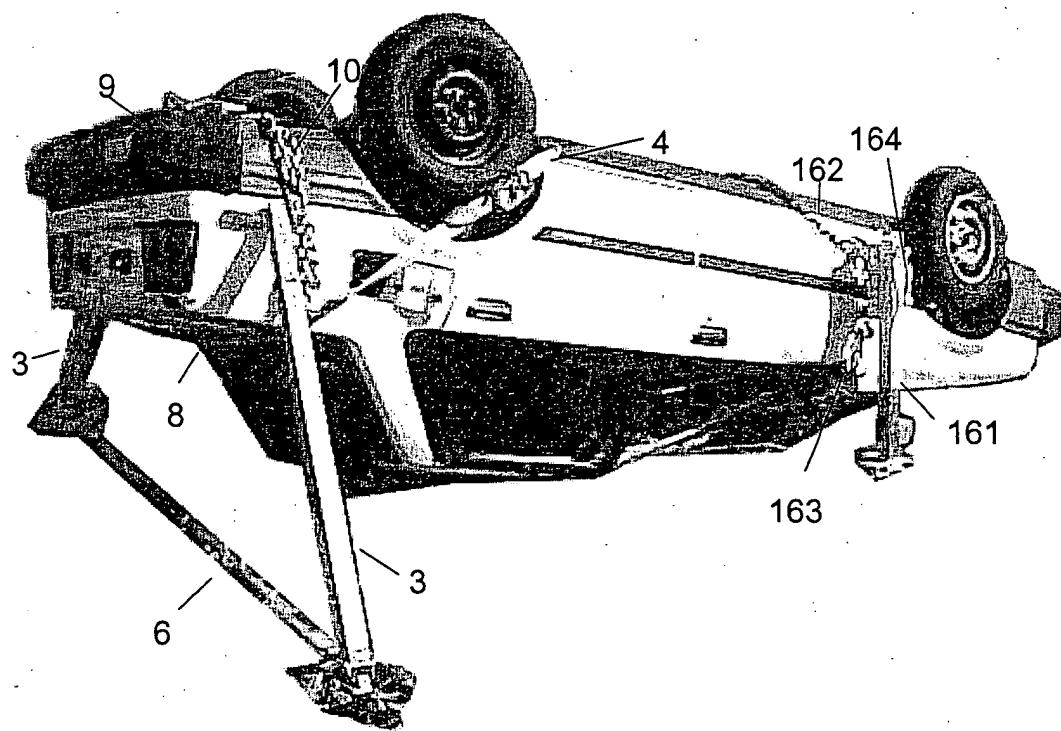


BEST AVAILABLE COPY

Fig. 17

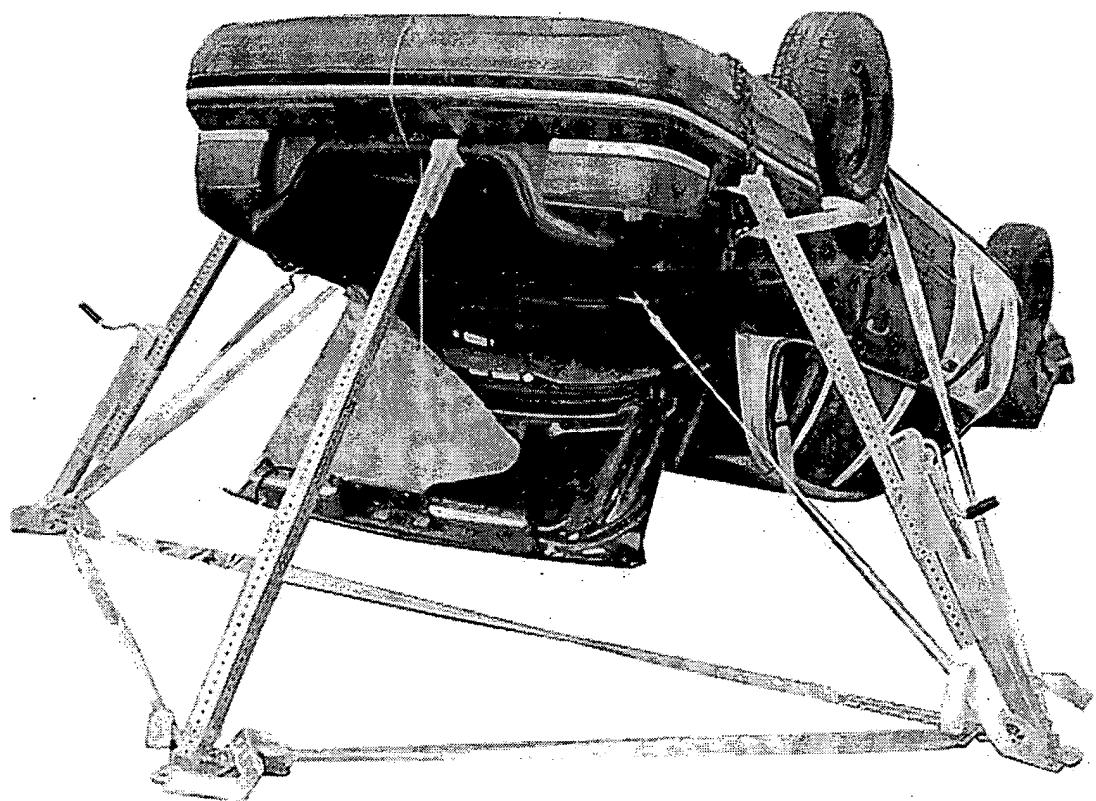


BEST AVAILABLE COPY

Fig. 18

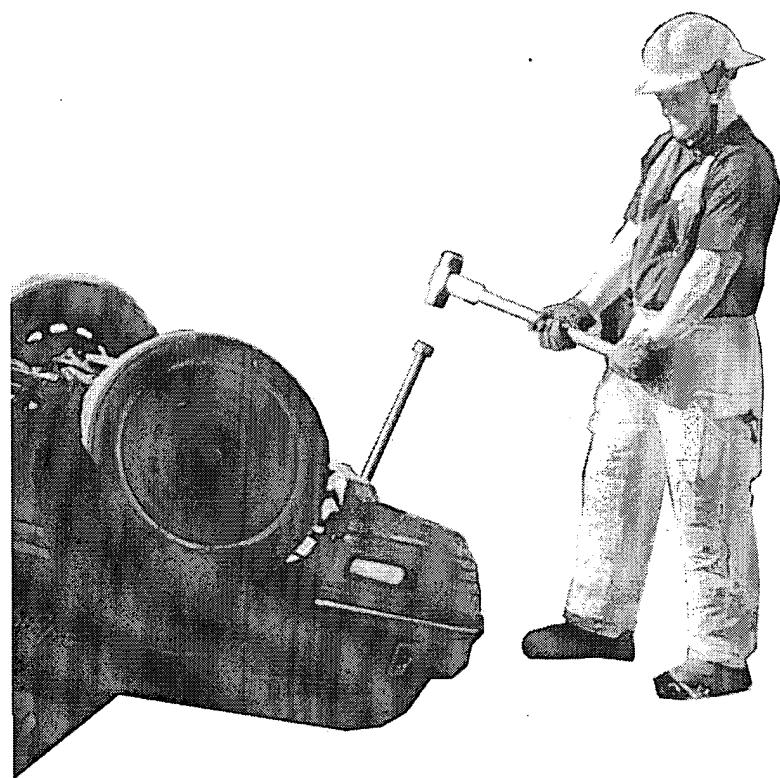


BEST AVAILABLE COPY

Fig. 19

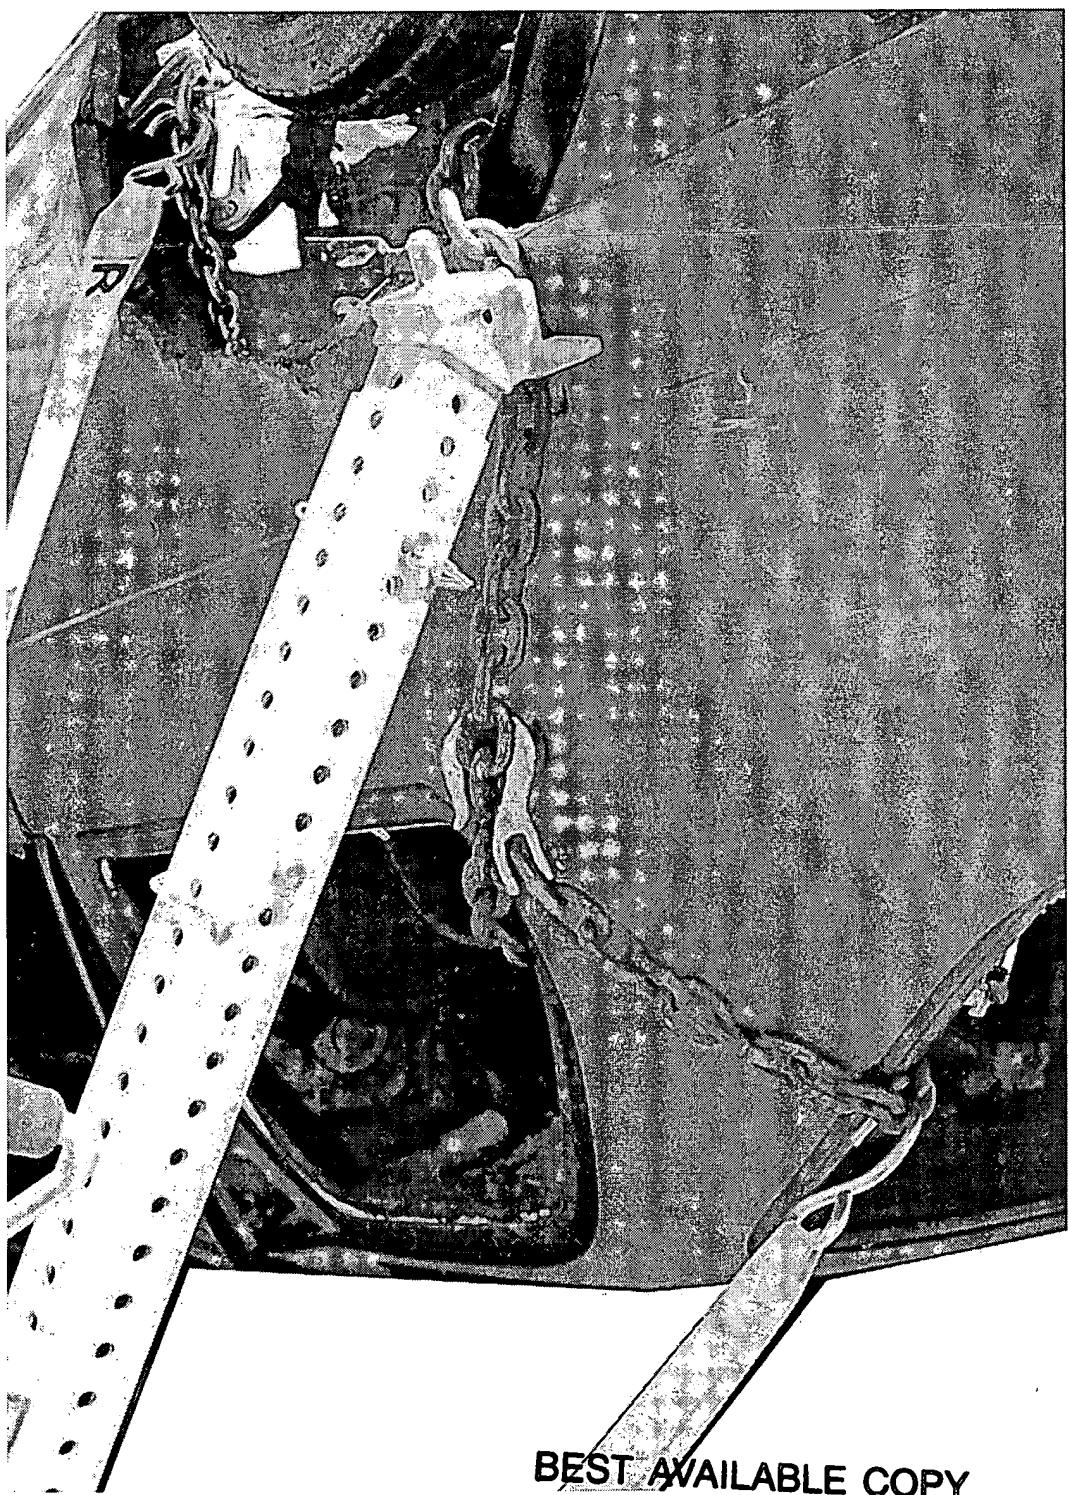


BEST AVAILABLE COPY

Fig. 20

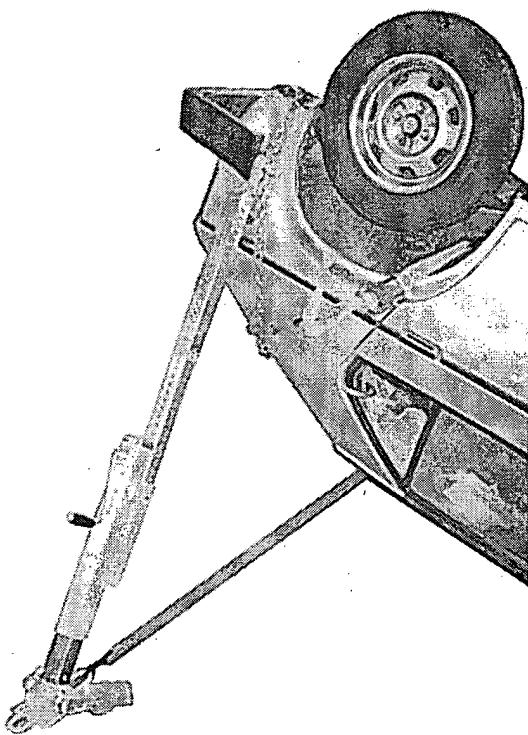


BEST AVAILABLE COPY

Fig. 21

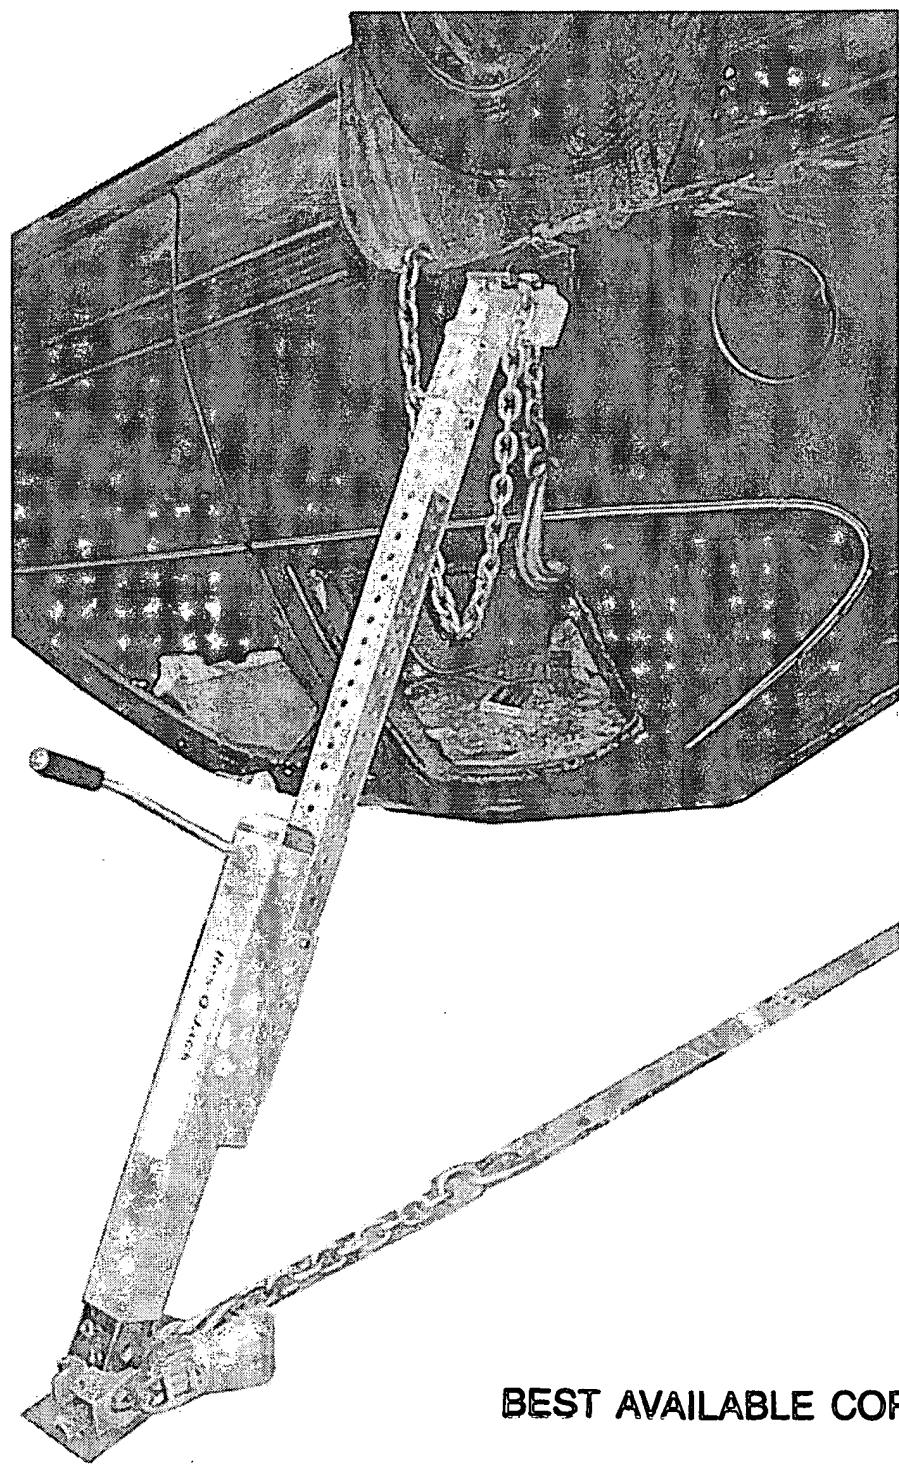


BEST AVAILABLE COPY

Fig. 22

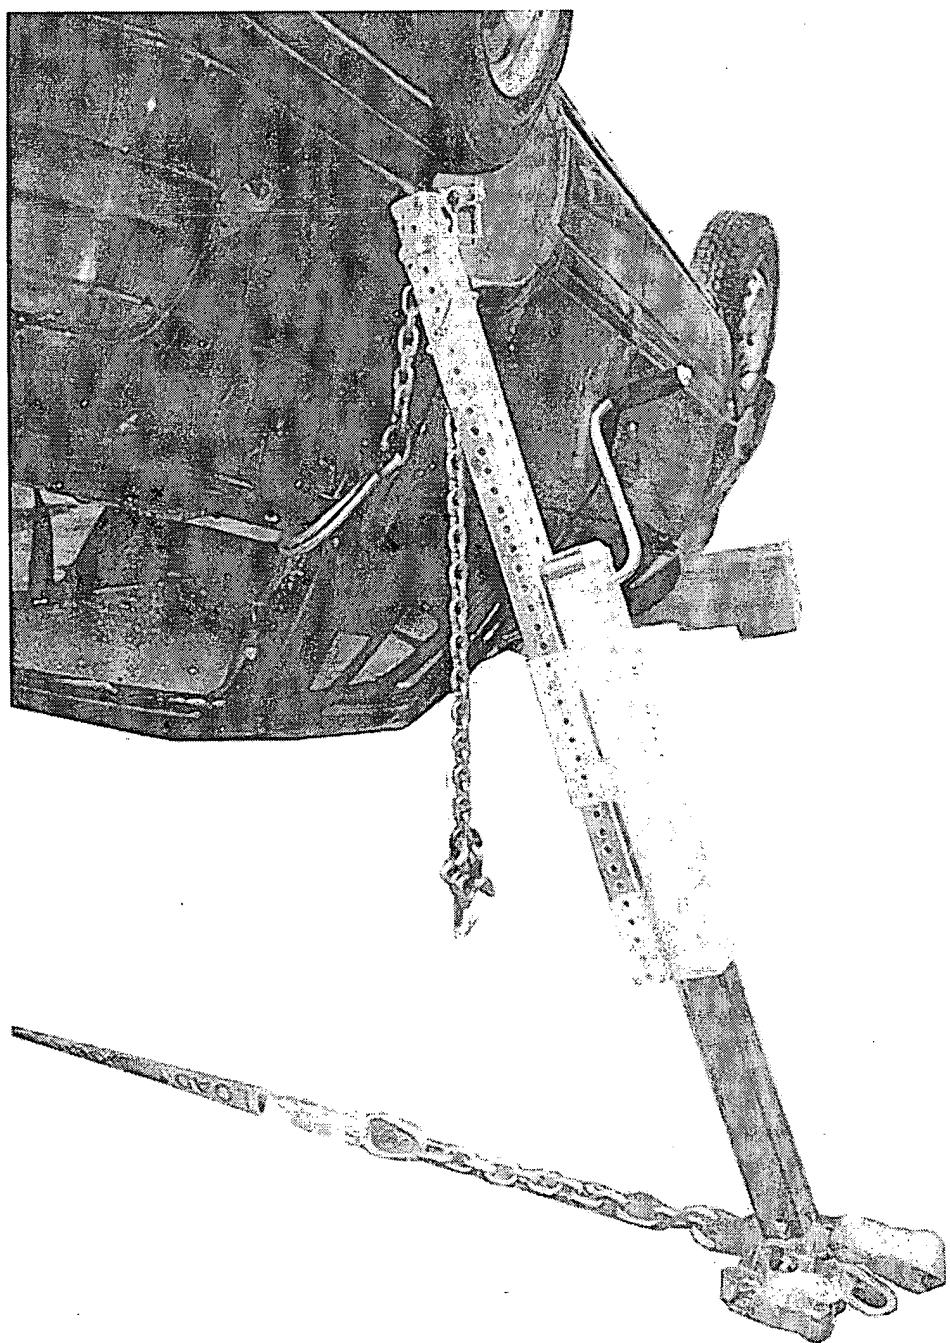


BEST AVAILABLE COPY

Fig. 23A

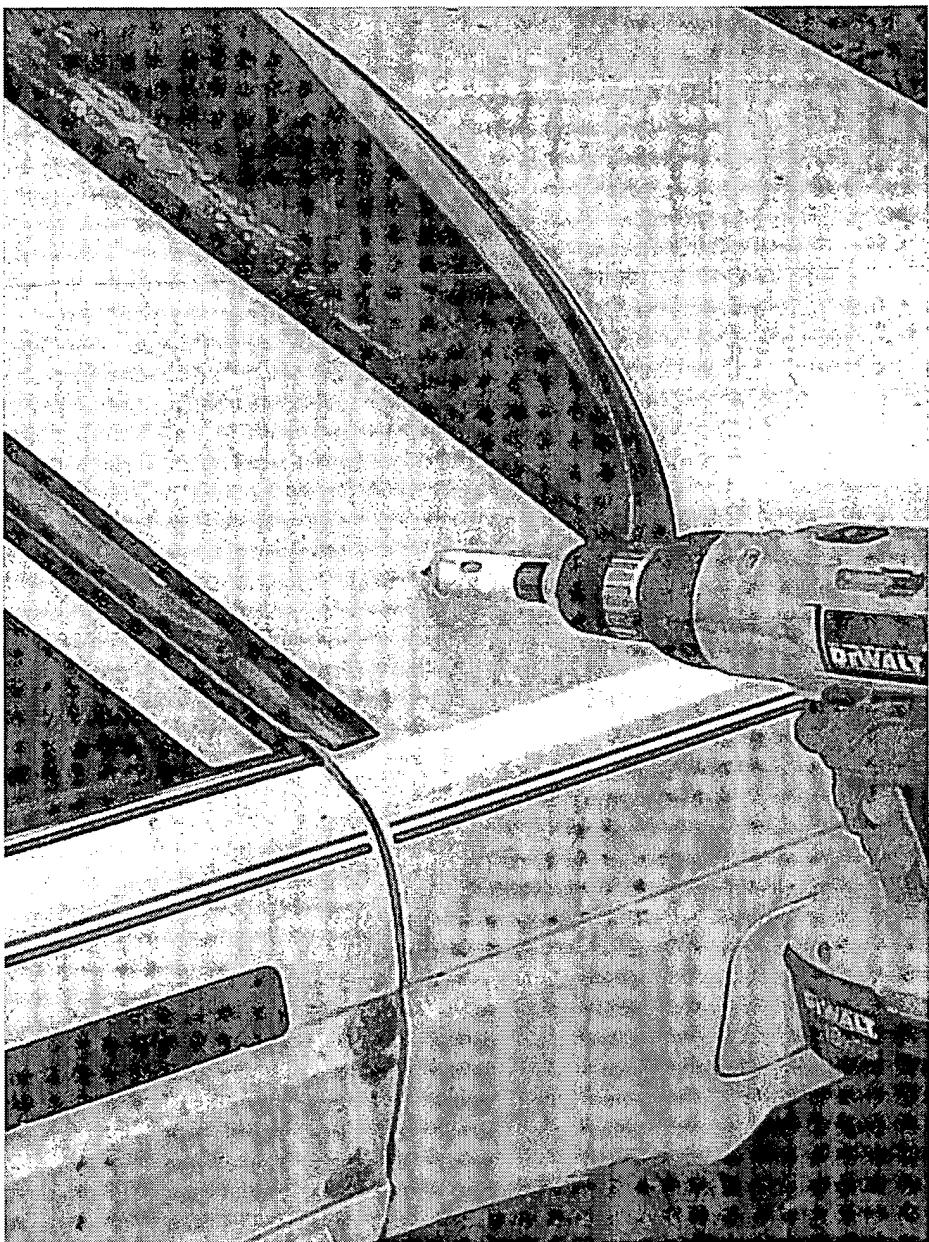


BEST AVAILABLE COPY

Fig. 23B

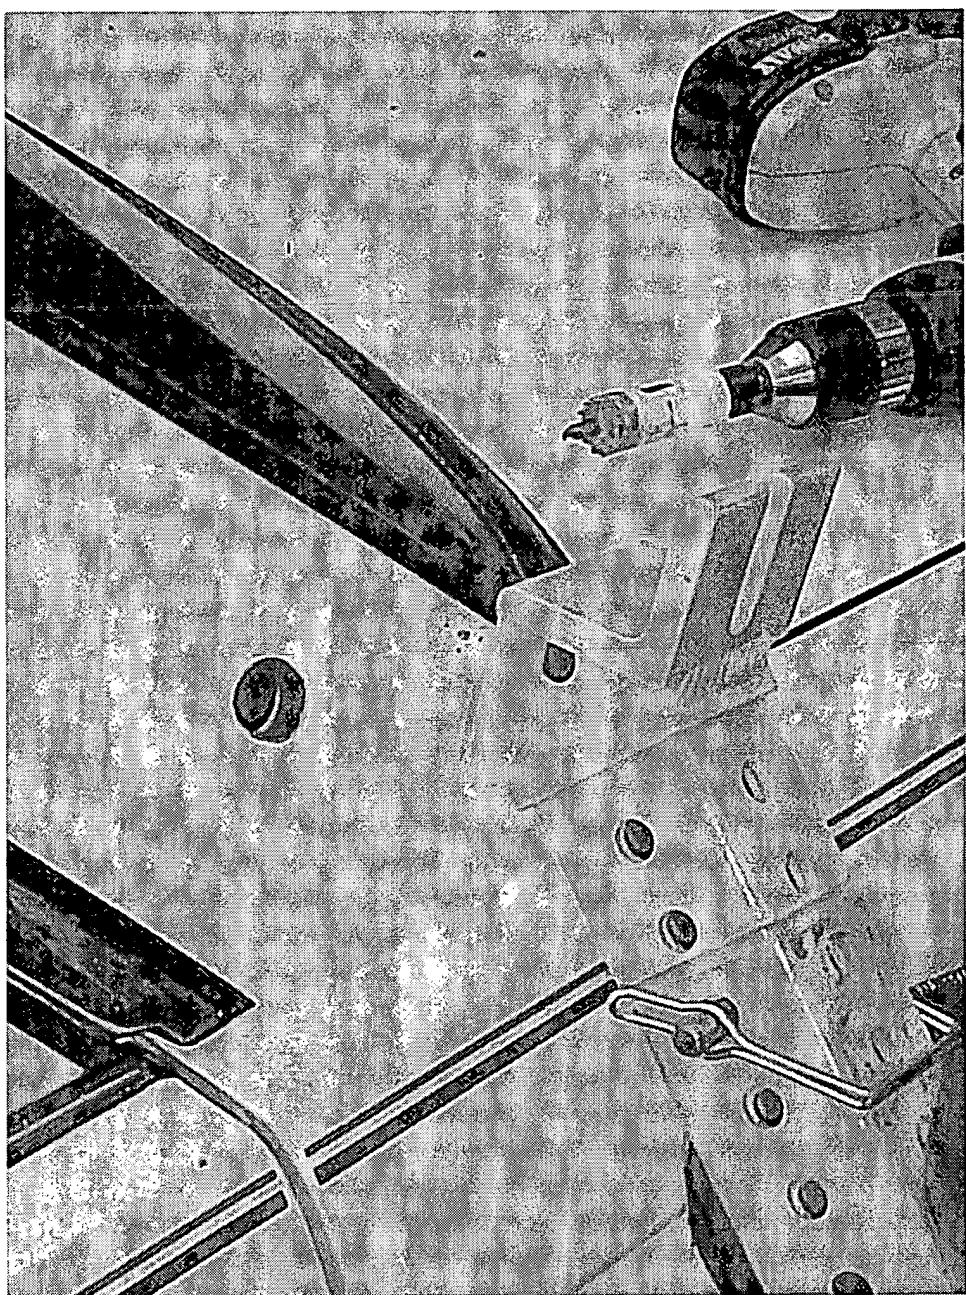

BEST AVAILABLE COPY

Fig. 23C

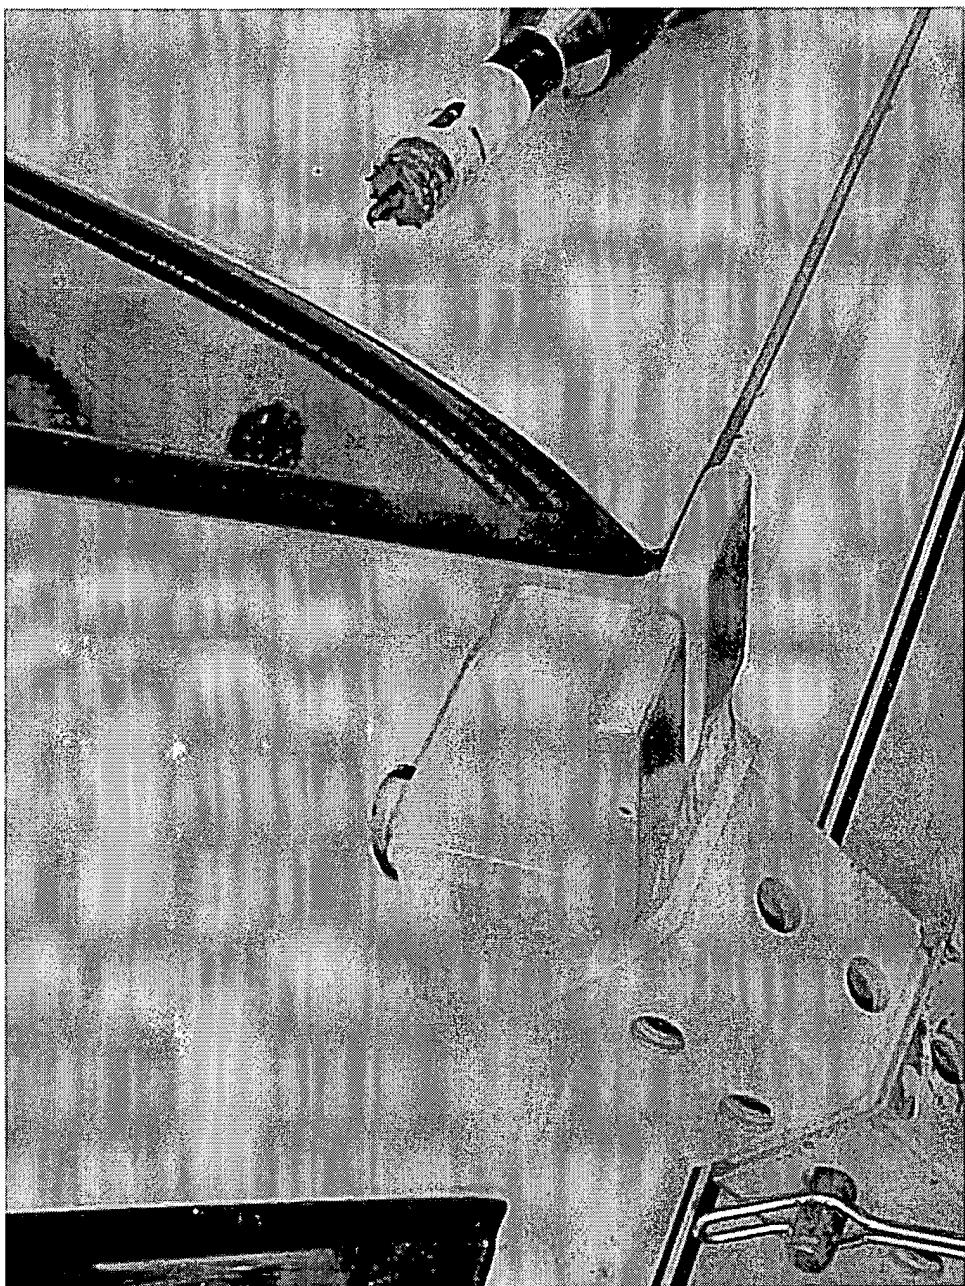

BEST AVAILABLE COPY

Fig. 24

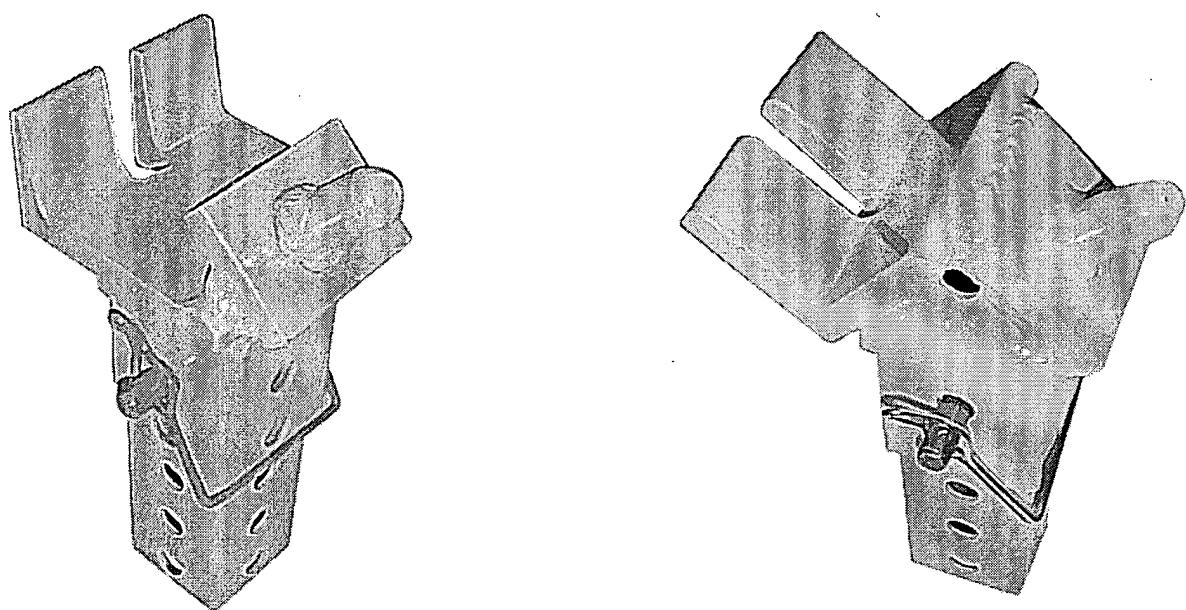


Fig. 25

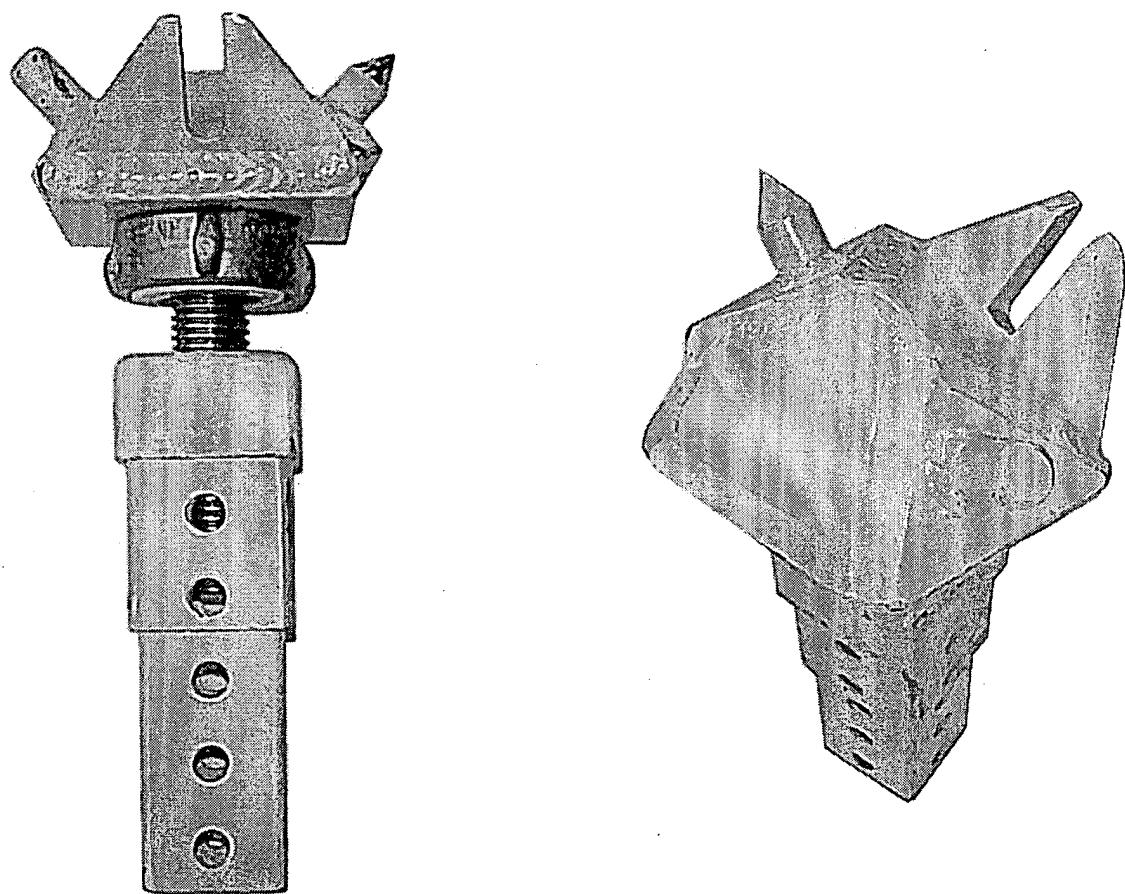


Fig. 26

